

FP-808

Sound Focusing Speaker



Description

Using the principle of sound focusing, a relatively independent music area is created, focusing the sound like the beam of a flashlight. The sound is clearest in the parabolic dome, and the sound played in each area does not interfere with each other. FP-808 sound focusing speaker is composed of sound focusing speaker and decoding player. With simple and easy installation, It also supports remote control operation, customized audio and video playback.


Features

- Rated power 30W
- Built-in infrared sensor for listeners
- Built-in high efficient amplifier
- Support USB/SD as audio or video source
- Power supply:DC12V
- Dimensions of focus speaker: 430×760×760mm

Specifications


Model		FP-808
Power	RMS	30W
	SNR	≥81dB
	Distortion	≤0.8%
Speaker	Unit driver	5.25"×1
	Sensitivity	90±2dB
	MAX. SPL	80±2dB
	Freq. Resp.	143Hz-21.5KHz
	Decoding format	MP3、WAV、FLAC、APE、MPEG4、H264、DIVX3 etc.
Others	Working temperature	-10°~50°
	Power	DC 12V
	Dimensions of focus speaker (H×W×D)	430×760×760mm
	Dimensions of decode player (H×W×D)	21×140×91mm
	Net weight	4.5kg

Product Information

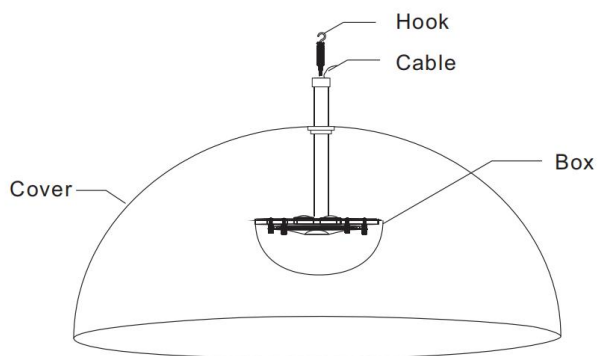


Recommended mounting height


About 2.5-3m from the ground

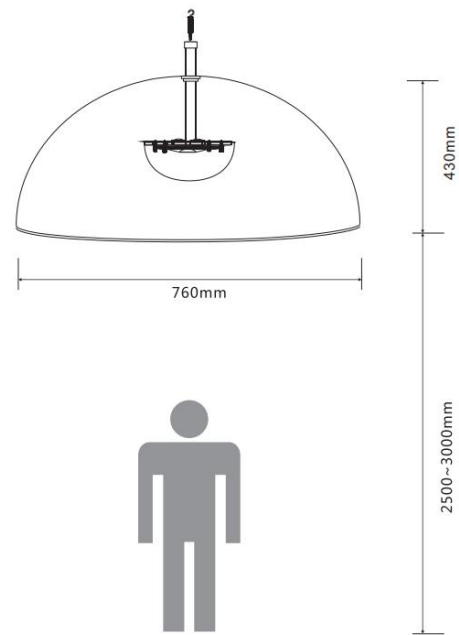


Installation

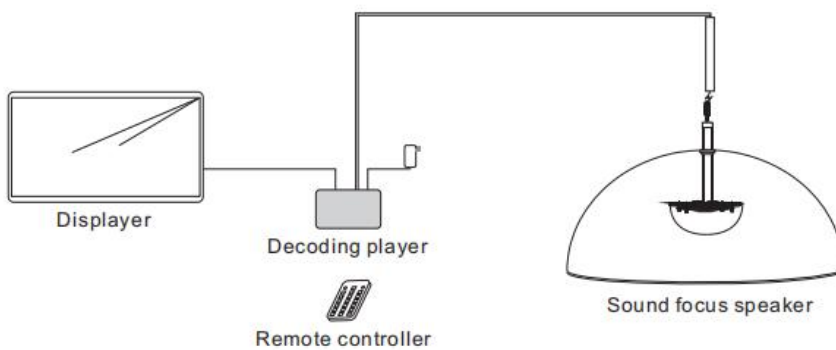

1. Connect the speaker with network cable, run the cable through the casing and hang it in a proper position.
2. Connect the decoding player with the speaker, displayer (optional) and power as the below diagram. And then insert SD card or USB.
3. Check if the installation is stable and reliable after the test.

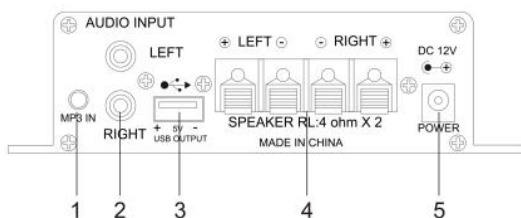

1. MP3 input
2. Audio input
3. USB port
4. Speaker terminal
5. DC12V power supply(for Amplifier)

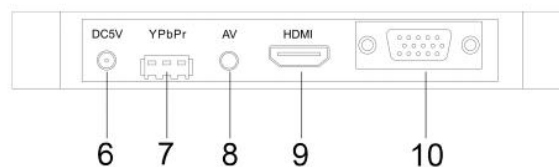

6. DC5V power supply(for Player)
7. YPbPr interface(Connect with speaker)
8. AV interface(connect with amplifier)
9. HDMI interface
10. VGA interface(connect with display screen)