

MP9810P 10 Channel Paging Selector



Features


- 10 Channels for paging or alarm signal broadcasting
- 2 MIC inputs, 2 line inputs
- Led indicator for each paging channel
- Built-in chime & mute function
- Controlled by remote paging set

Specification

Model	MP9810P
Inputs	Mic 1, 2: 600 Ω , 1.8 mV, unbalanced
	Line 1, 2: 10 k Ω , 200 mV, unbalanced
Audio output	0 dBV
Frequency response	Mic: 100 Hz---15 kHz; Line: 20 Hz---18 kHz
Signal to noise ratio	Mic input : 80 dB
	Line input : 90 dB
ALM Activation Level	0V or +12~24V Preset available
Protection	AC fuse $\times$ 1
Power Requirement	AC 220 ~240 V / 50~60 Hz
Dimensions	485×88×365 mm
Gross weight	6.5 KG
Net weight	5.2 KG


Specifications are subject to be changed without notice.

Front Panel

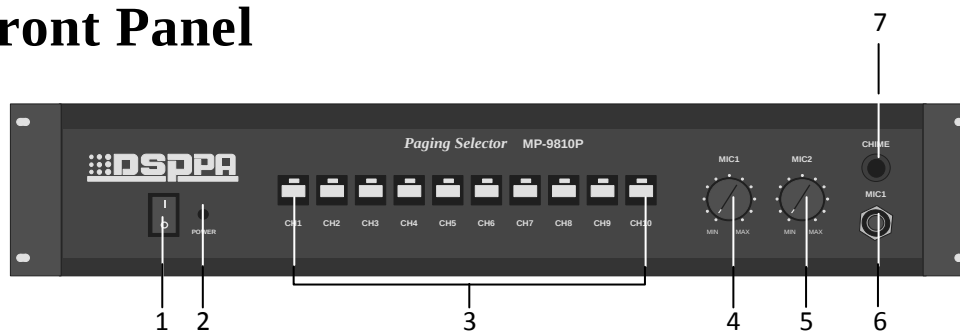

- | | |
|-------------------|--------------------|
| 1 Power switch | 5 Mic 2 Volume |
| 2 Power indicator | 6 Mic 1 Input jack |
| 3 Switches | 7 Chime button |
| 4 Mic 1 Volume | |

Rear Panel

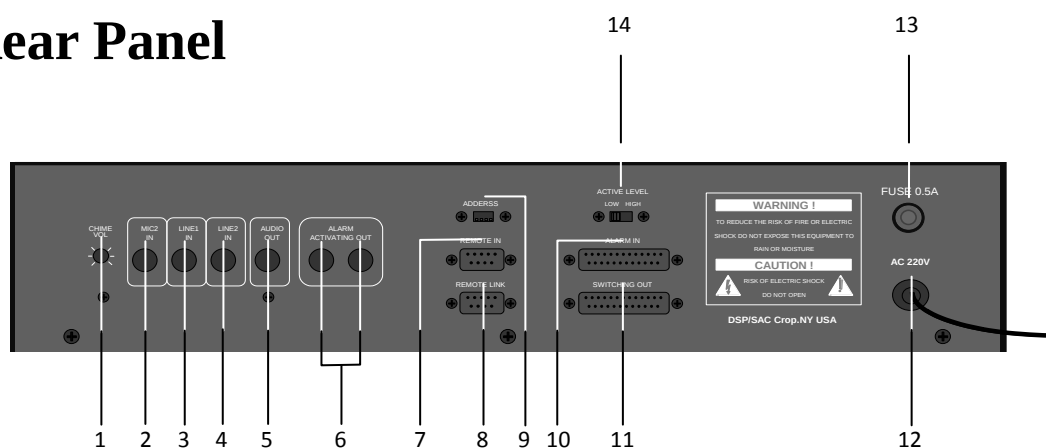

- | | |
|---|--------------------------|
| 1 Chime volume | 8 Remote Link |
| 2 Mic 2 Input jack | 9 Address for remote |
| 3 EMC/Line 1 Input jack (Emergency input) | 10 Alarm Input |
| 4 Line 2 Input jack | 11 Switching Output |
| 5 Audio Output | 12 Mains |
| 6 Alarm Activating Output | 13 Fuse |
| 7 Remote Input | 14 Active Level of Alarm |

Muting Function

- 1), Signal from **MIC2** and **LINE2** are automatically muted by signal from **MIC1** (**MIC1** input overrides **MIC2** and **LINE 2** signals).
- 2), Signal from **MIC1**, **MIC2** and **LINE2** are automatically muted by signal from **LINE1** (**LINE1** input overrides the other input signals).