


D6533A 300W Professional Active Speaker

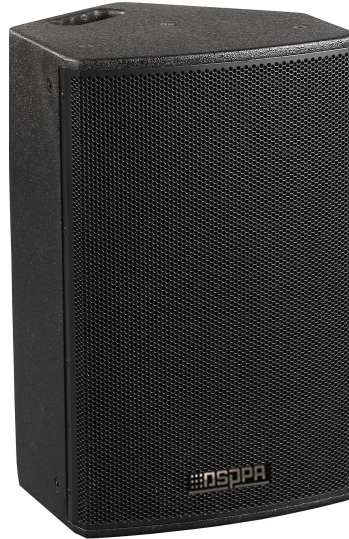

Features

- Rated Power: 300W
- Drive unit: 8" bass×1, 1.3" tweeter x1
- Frequency Response: 70 Hz – 18,000Hz
- Sensitivity: 95 ± 2dB
- Max SPL: 118 ± 2dB
- High peak power switching power supply
- Class-D independent power amplifier
- With one XLR input and one XLR output
- Qualcomm filter selection: 20Hz~400Hz optional
- Excellent mobile occasion application;
- Dual professional power interface.

Description

D6533A professional active conference speaker is powered by high peak power switching power supply, with Class-D independent power amplifier. The speaker has rich even harmonics, mellow sound quality, with pure and natural sound quality performance. It is suitable for performances, conferences, squares, shopping mall, etc.

Specification

Model	D6533A
Drive unit	8" bass×1, 1.3" tweeter x1
Freq. Response	70 Hz – 18,000Hz
Sensitivity	95±2dB
Max SPL	118±2dB
Input Resistance	20 kΩ
Rated Power	300W
Continuous power	180W (AES)
Directional(HxV)	100°×50°
THD	<0.05%
Damping coefficient	>400
Working Voltage	AC220V/50Hz
Dimensions (height × width × depth)	465mm×282mm×275mm
Weight	12kg

Dimensions

