

MP9813D

10 Channels Indirect Speaker Selector



Description

MP9813D has 2CH inputs, 10CH outputs and possesses the function of forced insertion. It has convenient all-on/all-off function control when the an alarm signal is input, the corresponding channel automatically switches to channel B.


Features

- 2-channel input (A and B), 10-channel output.
- Features forced insertion capability.
- All call button.
- When an alarm signal is input, the corresponding channel automatically switches to channel B.


Specifications

Model	MP9813D
Channels	10, switch able
Input capacity	70-100V , 10A
Channel capacity	70-100V , 5A/CH
ALM	0 (short circuit) is Valid
Protection	AC fuse
Power Requirement	AC 220V/50Hz
Outer Packing Size(mm)	(L×W×H) 530×440×195
Unit Size (mm)	(L×W×H) 484×365×88
Gross weight	8.3kg
Net weight	6.5kg


Product Information

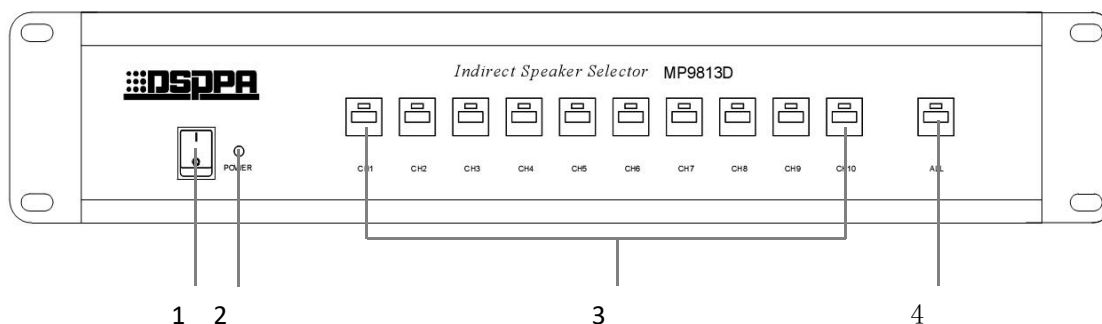

- 1 Power switch. (1 is power on and the “power LED” is on)
- 2 Power indicator.
- 3 Distributor.
- 4 All call button.

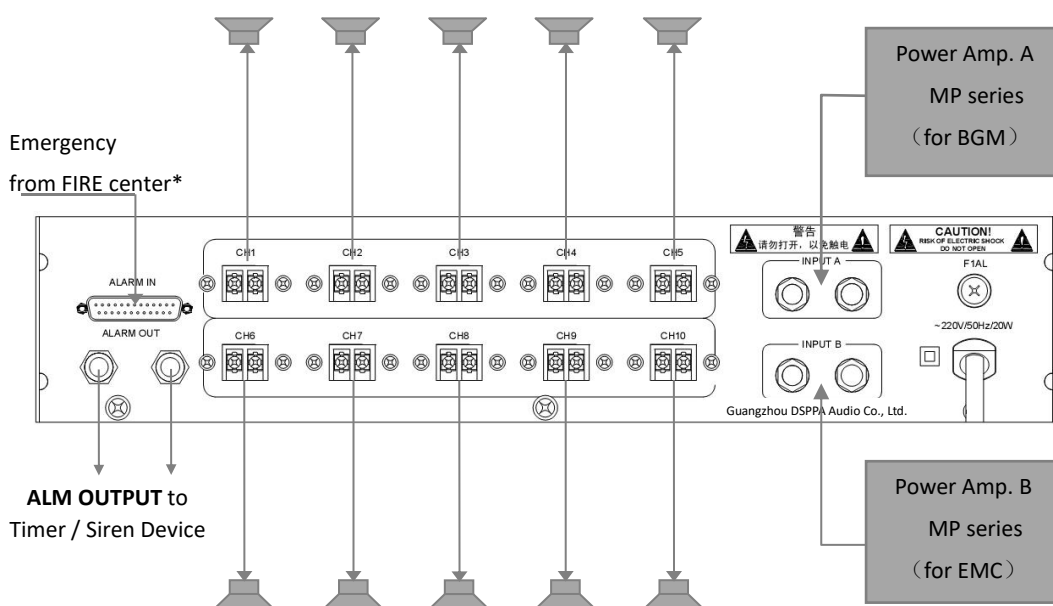

ALARM IN to be connected to fire center

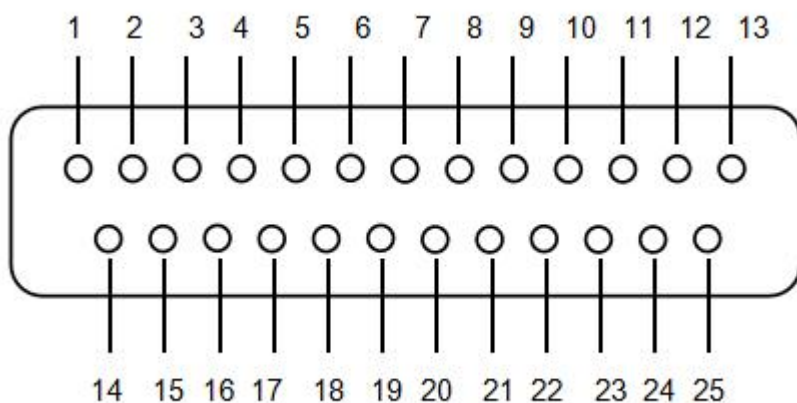

- 1-10 Live Terminals of CH1-CH10 respectively
- 14-25 COM