

DSP640 12W-45W Waterproof Rock Speaker



Description

DSP640 is a landscape garden speaker. It has a built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers. The high-class resin enclosure is of rock shape and weatherproof. It is with heavy damage proof finish. Easy and secure installation in outdoor area. It is an ideal choice for industrial and commercial applications in outdoor areas, such as train station, shopping mall, parking area and factory where background music and paging are needed.


Features

- Made of high-class resin, sturdy and style graceful, suited for grass plot;
- 70/100V, 12-45W, with multiple terminals, suited for different field;
- Max. Sound Pressure Level 102 ± 2 dB, Effective Freq. Range: 80Hz-16kHz;
- Weight 7 kg, standing steady;
- Waterproof driver, high sensitivity (88 ± 2 dB), long life, sounds clear and sonorousness.


Specifications

Model	DSP640
Full Range	6.5"×1
Rated Power	23W
Max. Power	45W
Line Voltage	70/100V
Sensitivity (1M, 1W)	88±2dB
Max. SPL (1M)	102±2dB
Frequency Response	80Hz-16kHz
Dimension (L×W×H)	250×360×420mm
Weight	7Kg


Freq. Response (dB SPL, 1W,1m)

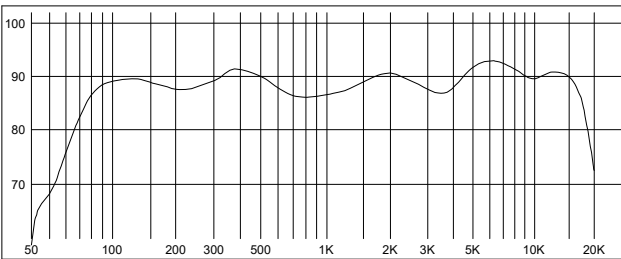

Distortion (THD< 1.5% 1W, 1m, 200Hz-10kHz)

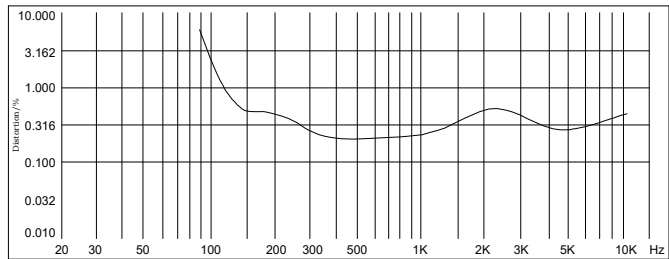

Dimension

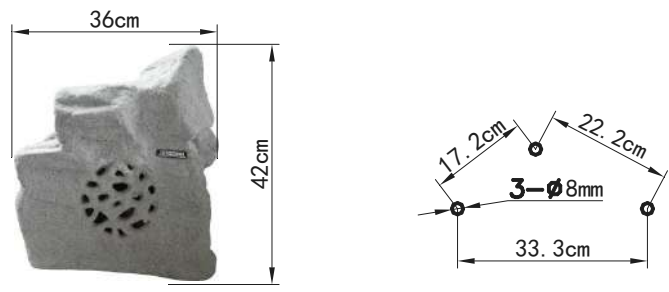

Installation

1. Setup a foundation like a platform with concrete and set 3 screws (8mm) stretching out 3cm in it as shown above after concrete rigidify continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power Voltage Terminals	70V	100V
Black---Blue	12W	23W
Black---White	23W	-

3. Fix the speaker system with 3 nuts on screws of the foundation;
4. Finally, examine whether it is steady.