

D6224

Full Digital conference Delegate Unit Microphone Gooseneck



Description

D62 series smart digital conference system provides functions such as discussion speech, votes, conference check-in, simultaneous interpretation, infrared voice distribution, teleconference and automatic camera tracking, etc. The system is composed of controllers, conference units, cameras and corresponding application software. The conference system includes conference controllers and extension controllers. The conference units include chairman speech units, conventioner speech units, vote units, interpretation units and infrared voice receiving units, etc. Application software includes computer remote control software, Android tablet PC control software and other application software.

Features


- The conference has 2m 8 core high-density DIN cable with an aviation plug.
- Electret, heart-shaped, directive, condenser type microphone, with double-color ring type indicating lights (red/green).
- The standard knob-type gooseneck microphone rod is available in 315mm and 415mm, and black and silver.
- The microphone rod is removable, so it is easy to maintain and store.
- Magnet HiFi speaker, which is muted when the microphone is on, and it is not easy to produce howl.
- 3.5mm stereo headphone jack for connection of headphones and the headphone volume is adjustable.
- Each conference unit has a unique ID code.
- With cameras, after properly configured on the conference controller or PC control software, it supports automatic camera tracking function.
- The unit is a passive equipment and is powered by the system controller, with input voltage being 24V.
- It has automatic EQ adjustment function, which helps to reduce howl.
- The conference unit has prompt tones when it is powered on, and the prompt tone may be deactivated.
- Chairman units are free from restrictions of speaking persons and may be activated freely.
- Chairman units has the priority to maintain order at the conference site.
- Chairman units are free from position limitations.

- Connection in "hand-in-hand" "T" and "+" modes.


Specifications

| Model | D6224 |
|--------------------------|--|
| Structure and Type | Desktop |
| Speaker Power | 1.5W |
| Static power consumption | <1W |
| Max. power consumption | 2W |
| SNR | >80dB |
| Crosstalk Attenuation | >80dB |
| Harmonic distortion | <0.5% |
| Headphone Output | 9dBu, 8-32Ω, 3.5mm |
| Working Power Supply | DC 24V power supply |
| Port on the unit | 8pin DIN socket |
| Type of microphone | Electret, heart-shaped, condenser type |
| Sensitivity | -45dBV/pa |
| Input impedance | 2kΩ |
| Equivalent Noise | 20dB (SPL) |
| Max SPL | 125dB (THD<3%) |

Front / Rear Panel

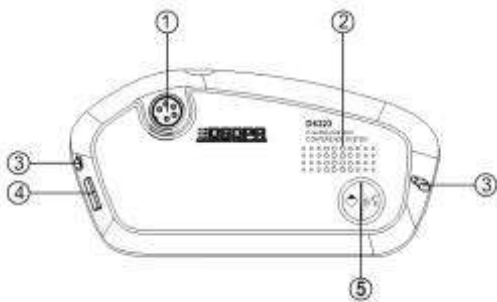

Top view of chairman unit

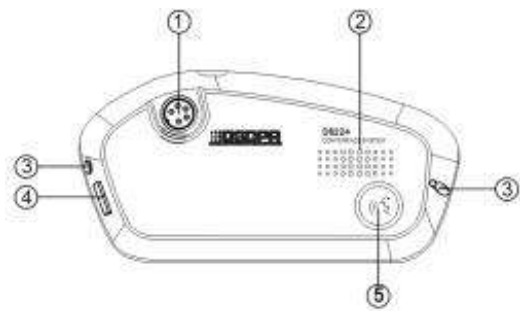

Top view of delegate unit



Side view of chairman unit and delegate unit

1. Microphone jack

- Removable 5-core spiral microphone jack.

2. Built-in speaker

- It is used to output the sound from speeches of other units and the secondary input audio. The volume may be adjusted by the unit or by the host and remote control software.
- The speaker will be turned off when the microphone is powered on or a headphone is plugged.

3. Headphone jack


- Headphone is connected to the unit via a 3.5mm connector.

4. Volume adjusting knob

- It is used to adjust the output volume of headphone and speaker.

5. Microphone power on/off button and its indicating light

- Delegate unit microphone on/off button/speech application button and button indicating light. The indicating light is on when this button is pressed to power on the microphone; the indicating light blinks when this button is pressed to send a speech application, when the conference units are renumbered and when the camera tracks the spokesman.
- Chairman unit microphone on/off button and chairman priority button and indicating light.

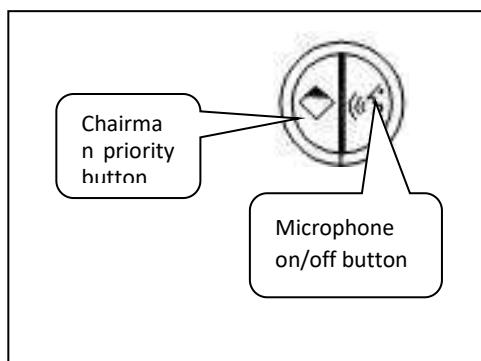

- The indicating light blinks when the button is pressed to power on the microphone, when the conference units are renumbered and when the camera tracks the spokesman.
- When the Chairman priority button is pressed, the conference unit delivering a speech will be mute or closed.