

DSP620

Mushroom Speaker



Features

- IP×6 waterproof level
- Max SPL: 101±2dB
- 6.5"×1 full-range driver
- Power taps at 10W-20W@100V
- Built-in 100v/70v transformer
- Wide Freq.Resp.:150Hz-13kHz
- High sensitivity: 91±2dB
- Heavy damage proof finish
- Landscape garden type loudspeaker
- high quality engineering plastic material

Description

The DSP620 is a landscape garden speaker with 70v/100v transformer built in. The 70v/100v transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible.


The high quality engineering plastic enclosure is of mushroom shape and has weatherproof and heavy damage proof finish. Easy and secure wall mount installation in outdoor area.

It is an ideal choice for industrial and commercial applications in the outdoor area of train station, shopping mall, parking area and factory where background music and paging is needed.


Specification

Model	DSP620
Full-range	6.5"×1
Rated Power	20W
Max Power	40W
Line Voltage	70/100V
Sensitivity(1M,1W)	91±2dB
Max SPL(1M)	101±2dB
Freq. Resp	150Hz-13kHz
Dimension(L×W×H)	350×360mm
Weight	4.5kg

DIMENSIONS



INSTALLATION HOLE



Installation


1. Setup a foundation like a round platform with concrete and set 3 screws (8mm) stretching out 3cm in it as shown above after concrete acidify continue;
2. Connect audio broadcasting wire to the speaker terminals according to the table below;

Power	Line	Voltage	70V	100V
Terminals				
Black---Blue			10W	20W
Black---White			20W	--

3. Fix the speaker system with 3 nuts on screws of the foundation;
4. Finally, examine whether it is steady.

FREQ. RESPONSE

(dB SPL, 1W, 1m)

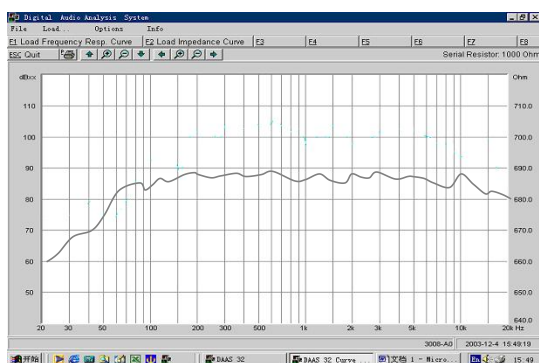

DISTORTION

(THD<1.5% 1W, 1m, 140Hz~12kHz)

