

MP9810RII 100 Zones Paging Microphone



Features

- 1 MIC and 1 LINE input. Volume variable
- Built-in Chime function.
- Built-in Muting function.
- Frequency response: Mic: 150Hz-15kHz; Line: 20Hz-20kHz (± 3 dB)
- Up to 10 MP9810P paging selectors can be established for paging.
- Remote paging distance up to 1km


Description

MP9810RII Zone Paging Microphone built-in chime, mute function. Up to 10 MP9810P paging selectors can be established for paging. Remote paging distance up to 1km. Easy to use. And the clear sound system of little distortion transmission will bring you great comfort.

Specification


Model	MP9810RII
Inputs	Mic: 5 ± 1 mV, unbalanced Line: 1 ± 0.1 V, unbalanced
Audio output	1 ± 0.1 V
Frequency response	Mic: 150Hz-15kHz; Line: 20Hz-20kHz (± 3 dB)
Signal to noise ratio	Mic input: greater than 60dB Line input: greater than 70dB
Protection	AC fuse 200mA
Power Requirement	AC 220-240V/50-60Hz
Dimensions	270 $\times$ 180 $\times$ 55mm
Gross weight	1.5kg
Net weight	1.2kg

FRONT PANEL

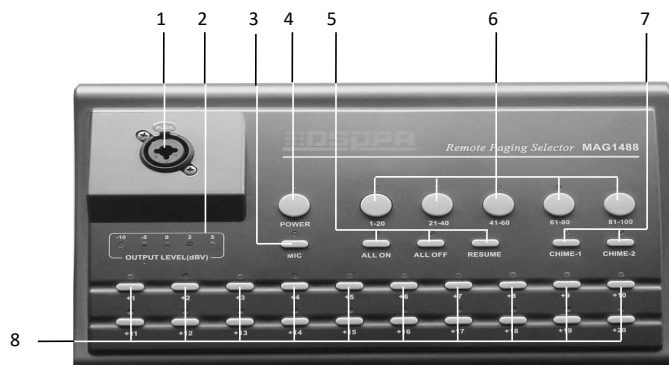

- 1.XLR MIC Base
- 2 Level indicator
- 3 MIC Switch
- 4 Power Switch
- 5 Function Keys
- 6 Range Select Key
- 7 Chime Keys
- 8 Zone Select Keys

REAR PANEL

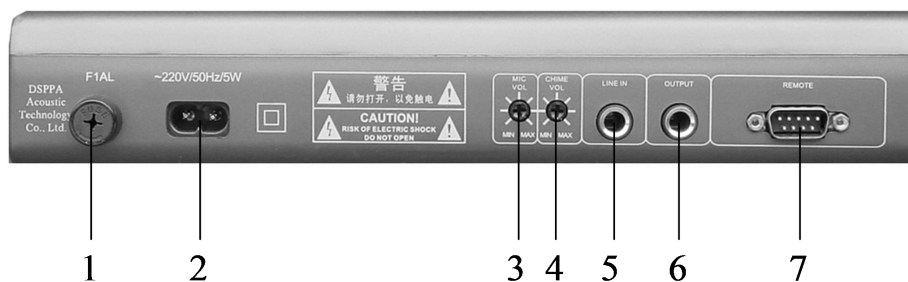

- 1 Fuse
- 2 Mains
- 3 Mic volume
- 4 Chime Volume
- 5 Line Input
- 6 Audio Output
- 7 Remote Port

Connection

■ Professional Audio Manufacturer

